


# Wireless Retrofit Kit for FTS 96 brown

Art.-Nr. FU8402B

Seite 1 von 2

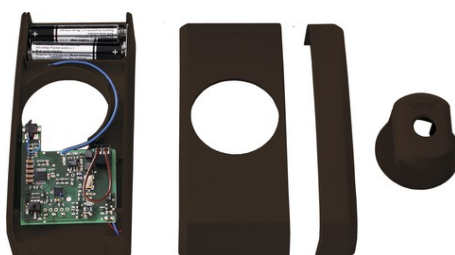

At first glance, the purely mechanical FTS 96 window protection system can not be distinguished from the electronic FTS 96 E wireless window protection system. With the wireless retrofit kit, you can prepare the mechanical FTS 96 window protection system for use with the Secvest 2WAY. The wireless upgrade kit includes: A new rotary knob, new protective cover, lock and lock box, as well as batteries, and an electronics attachment. Previously installed FTS 96 window protection systems can be upgraded at any time.

## Technologies

- Combines mechanical with electronic security technology
- Converts existing FTS 96 into wireless detectors for the Secvest 2WAY
- Easy upgrade
- Optional connection of a passive glass break detector

## Technical data - Wireless Retrofit Kit for FTS 96 brown

Battery - max. battery life	2 y
Battery - type	2 x 1.5 V LR03 AAA alkaline batteries
Connections	Clamping terminal
DC voltage supply	3 V
Dimensions	(WxHxD) 78x125x55 mm
Environmental class	II
Height	125 mm
Housing material	ABS
Installation location	Windows and doors
Length	55 mm
Max. operating temperature	55 °C
Max. receiving range (free field)	100 m
Max. transmission range (building)	30 m
Min. operating temperature	-10 °C
Modulation	FM

# Wireless Retrofit Kit for FTS 96 brown

Art.-Nr. FU8402B

Seite 2 von 2

---

## Technical data - Wireless Retrofit Kit for FTS 96 brown

PSTI conformity required	No
Radio frequency	868,6625 MHz
Radio power	10 mW
Sabotage monitoring	Yes
Sensor type	Reed contact, magnetic field sensor system
Type of detection	Magnetic field measurement
Voltage monitoring	Yes
Width	78 mm