


Secvest Wireless Retrofit Kit for FTS 96 (brown)

Art.-Nr. FUFT50008B

Seite 1 von 2

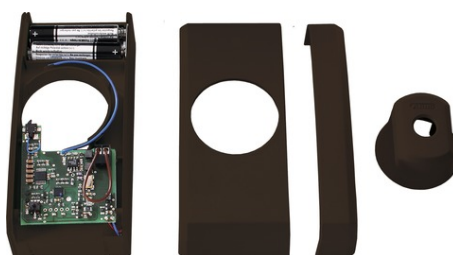

Connecting mechanical security and electronic monitoring

At first glance, it is difficult to tell the difference between the FTS 96 window lock, which is purely mechanical, and the FTS 96 E wireless window lock, which is electronic. You can use the wireless upgrade kit to prepare the FTS 96 mechanical window lock for use with the Secvest wireless alarm system.

The wireless upgrade kit contains: Electronic unit with circuit board, batteries, rotary knob cover, dust cover for lock and lock casing. Upgrading FTS 96 window locks that have already been installed is simple and uncomplicated and can be done at any time.

Note: We recommend the ABUS wireless test box for optimum detection of the wireless range of the mechatronic products on site.

Technologies

- Double your protection by combining mechanical security with electronic monitoring
- Active intrusion protection, thanks to simple upgrading of the mechanical system with electronics
- Even detects intrusion attempts
- Connection points for passive glass break detectors

Technical data - Secvest Wireless Retrofit Kit for FTS 96 (brown)

Battery - max. battery life	2 y
Battery - quantity	2
Battery - type	2 x 1.5 V LR03 AAA alkaline batteries, Varta Industrial / Industrial Pro, Duracell Industrial, Panasonic Powerline
Colour	brown
Compatible with	Secvest, BUM060040
Connections	Clamping terminal

Secvest Wireless Retrofit Kit for FTS 96 (brown)

Art.-Nr. FUFT50008B

Seite 2 von 2

Technical data - Secvest Wireless Retrofit Kit for FTS 96 (brown)

DC voltage supply	3 V
Dimensions	(WxHxD) 78x125x55 mm
Environmental class	II
Height	125 mm
Housing material	ABS
Installation location	Windows and doors
Length	55 mm
Max. operating temperature	55 °C
Max. receiving range (free field)	100 m
Max. transmission range (building)	30 m
Min. operating temperature	-10 °C
Modulation	FM
PSTI conformity required	No
Radio frequency	868,6625 MHz
Radio power	10 mW
Sabotage monitoring	Yes
Sensor type	Reed contact, magnetic field sensor system
Type of detection	Magnetic field measurement
Voltage monitoring	Yes
Width	78 mm