


CodeLoxx Intrusion AEBasic Protokoll Panik Security

Art.-Nr. CLX-LA-AFP-10-P

Seite 1 von 2

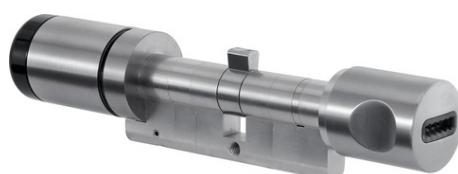

This premium electronic CodeLoxx cylinder provides more security, control and convenience at your door. It is operated using the read-protected ABUS Seccor chip key. A special advantage of this cylinder is the wireless module in the inside knob, which allows for incredibly easy operation of the alarm system in conjunction with the AEBasic analysis unit. The protocol and time function makes it possible to save events and allocate rights depending on the time of day or the day of the week. The cylinder has additional plating for even more protection against break-ins. The unique modular extension system guarantees maximum flexibility during installation, use or structural changes.

Technologies

- Electronic double knob cylinder with chip key reader and logging function
- Suitable for use with AEBasic analysis unit (3 m wireless transmission) for arming/disarming burglar alarm systems
- Optical signalling
- Panic function: for locks that require a defined locking nose position
- Extremely tamper-proof cylinder thanks to ABUS Security drill protection

Technical data - CodeLoxx Intrusion AEBasic Protokoll Panik Security

| | |
|---------------------------------|--|
| Annual profiles | 6 |
| Area of application | Panic locks compliant with DIN179, which require a defined locking nose position, doors with PZ mortise lock |
| Colour | Stainless steel |
| Combination code | No |
| DC voltage supply | 3 V |
| Drill protection | Security |
| Electronics | AEBasic |
| Emergency power supply possible | Yes |
| Event memory | 1000 |
| Inner knob diameter | 33 mm |
| Inner knob length | 49 mm |
| Locking media | ABUS-Seccor key reader |
| Logging and time function | Yes |
| Material | Stainless steel knobs, plastic cap inside |
| Max. number of locking media | 511 |

CodeLoxx Intrusion AEBasic Protokoll Panik Security

Art.-Nr. CLX-LA-AFP-10-P

Seite 2 von 2

Technical data - CodeLoxx Intrusion AEBasic Protokoll Panik Security

| | |
|-------------------------------------|--|
| Max. operating temperature indoors | 60 °C |
| Max. operating temperature outdoors | 60 °C |
| Min. operating temperature indoors | -10 °C |
| Min. operating temperature outdoors | -20 °C |
| Modularly extendible | Yes |
| Opening time can be set | between 6 and 12 seconds |
| Outer knob diameter | 30 mm |
| Outer knob length | 39 mm |
| Permanent access | No |
| Programming | Via programming key and/or PELT or SKM with TG-SKM |
| Protection class IP Indoor | 55 |
| Protection class IP Outdoor | 55 |
| Reader type | Chip key reader |
| Signalling | optical |
| Special design axle | For doors with PZ perforation |
| Standard length | Length measurement when ordering |
| Weekly profiles | No |
| ZAAP | No |